

Engagement Made Simple

Interactive Flat Panel Display - Education Series (UT)







40-Points



Anti-Glare



USB-C



Android 9.0



Broad Compatibilit

AUO Display Plus, as a global leader in commercial and industrial displays, has designed the Education Series Interactive Flat Panel Display dedicated for collaboration in educational settings. Ranging from 65 to 86 inches, this series features UHD 4K resolution, up to 40 points multi-touch, built-in interactive tools and apps, and supports both Android and Windows systems, enhancing interactivity and engagement in classrooms and lecture halls.

Superb Image Quality

4K Crystal Clear Visuals


The Education Series Interactive Flat Panel Display features native 4K (3840 x 2160) resolution and uses special anti-glare treatment to ensure sharp and clear rendering of images and text under any ambient lighting condition from any viewing angle.



Premium User Experience

Intuitive Interactive Tools

In addition to floating tool bars for easy operation, the series also comes with a range of apps and tools for annotating, whiteboarding, mutli-screen casting, file management, voting, and more, to facilitate interactions in any classroom setting.

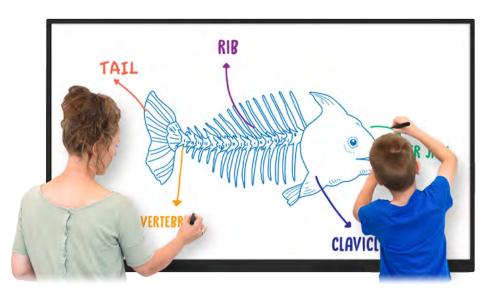



EShare Pro

With support for two-way mirroring, remote touch control, and file casting, you can wirelessly share content from any laptop, notebook, and mobile phone and enjoy wireless mouse, keyboard, and remote controller functionalities with 128bit encryption to keep your data secure.

Google Search Widget

The home screen provides direct access to Google search, giving you the fastest way for searching the internet without having to open a browser app.

Convenience By Design

Safeguard Application Compatibility


The OPS slot provides the flexibility to use Windows-based slot-in PCs. It enables users to easily switch and enjoy all kinds of software on Android and Windows systems without compatibility issues or having to connect additional PCs externally.



Connect Everything You Need

The series offers an extensive range of connectivity options such as USB, USB-C, DisplayPort, HDMI, VGA, RS-232 for you to connect any device. Streamline your setup through plug-n-play USB-C connection that delivers data, audio, video, and power via a single cable.

RS-232



VGA



Interactive Flat Panel Display - Education Series (UT)







Specifications

Specifications					
Product			UT6501	UT7501	UT8601
	Size		65"	75"	86"
	Resolution		UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160
	Brightness		350 cd/m² (typ.)	400 cd/m² (typ.)	400 cd/m² (typ.)
Display	Contrast Ratio		1200:1 (typ.)	1200:1 (typ.)	1200:1 (typ.)
	Dynamic Contrast Ratio		4000:1	4000:1	4000:1
	Display Colors		8bit + FRC, 1.07B	8bit + FRC, 1.07B	8bit + FRC, 1.07B
	Color Gamut		72% NTSC (typ.)	72% NTSC (typ.)	72% NTSC (typ.)
	Viewing Angle (H/V)		178° / 178°	178° / 178°	178° / 178°
	Response Time		8ms (typ.)	8ms (typ.)	8ms (typ.)
	Frame Rate		60Hz	60Hz	60Hz
	Active	mm	1428.48 x 803.52	1649.66 x 927.94	1895.04 x 1065.96
	Display	in.	56.24 x 31.63	64.95 x 36.53	74.61 x 41.97
	Backlight Type			Direct LED	
	Processor		Cortex A73 1.8GHz Quad Core CPU		
	Memory		8GB		
	Storage		64GB		
	Operating System		Android 9.0		
Touch Connectivity Power Mechanical	Touch Type		IR		
	Response Time		≤8ms		
	Multi Touch Point		Up to 40 Points		
	Touch Accuracy		±1 mm		
	OS Support		Multi Touch (Windows 10/8/7, Android) Single Touch (Windows XP, Linux, Mac OS X, Chrome)		
	Inputs		HDMI 2.0 x 3, DP 1.2a x 1, VGA x 1, Audio In x 1, Mic In x 1, RS-232 x 1		
	Outputs		Audio Out x 1, HDMI Out x 1		
	USB		USB2.0 Type-A x 1, USB3.0 Type-A x 4, USB3.0 Type-B (Touch) x 2, USB-C x 1		
	LAN		RJ-45 x 2		
	Power Supply			AC 100V ~ 240V, 50/60 Hz	
	Power Consumption		300W	380W	460W
	Standby Mode			< 0.5W	
	Housing Material			Aluminum, Metal Plate	
	Housing Color			Black	
	Set	mm	1511.6 x 920.3 x 87.8	1722.5 x 1034.6 x 87.1	1967.9 x 1172.6 x 87.1
	Dimension	in.	59.51 x 36.23 x 3.46	67.81 x 40.73 x 3.43	77.48 x 46.17 x 3.43
	Package	mm	1660 x 1045 x 245	1880 x 1160 x 280	2140 x 1340 x 280
	Dimension	in.	65 x 41 x 10	74 x 46 x 11	84 x 53 x 11
	VESA Mount		600 x 400 mm	800 x 400 mm	800 x 400 mm

■info@auodplus.com

auodplus.com

Taiwan (Headquarters) AUO Display Plus Corp. +886-3-5631288

USA

AUO Display Plus America Corp. Boston: +1-781-362-4757 Irvine: +1-408-398-5390

Europe

AUO Display Plus Netherlands, B.V. +31-20-7940825



Japan AUO Display Plus Japan Corp. Tokyo: +81-3-6435-1898

China

AUO Display Plus Technology (Suzhou) Co., Suzhou: +86-512-6258-8899 Shenzhen: +86-755-2585-7795

